

Product Description

Equitilt® FlameGuard® is a non-combustible architectural walling panel system manufactured with a mineral wool fibre core material. Equitilt® FlameGuard® is FM Approved to FM 4880 No Height Restriction. Equitilt® FlameGuard® Plus is FM Approved to FM 4880 & FM 4881 No Height Restriction. These panels are recommended to be used where improved fire performance is required for insurance purposes in walling applications.

Panel Properties				
Panel Thickness (mm)	FlameGuard®		FlameGuard® Plus	
	50	75	100	150
Typical Mass (kg/m ²) based on 0.6/0.6mm skins	15.6	18.1	20.6	25.6
Declared λ (W/m.K) at 23°C	0.037	0.037	0.037	0.037
Declared R-value (m ² K/W) at 23°C	1.4	2.0	2.7	4.1
Total R-value (m ² K/W) at 15°C (Winter)	1.6	2.3	3.0	4.4
Total R-value (m ² K/W) at 30°C (Summer)	1.5	2.1	2.8	4.1

Note: The Declared R-value is at 23°C in accordance with AS/NZS 4859.1:2018 & AS/NZS 4859.2:2018.

Max. Lengths for Standard Supply				
Max Panel Length (m)	5	7	9	11 <small>(Special Order)</small>

Span Table

NON-CYCLONIC REGION A&B (WALL APPLICATIONS ONLY)

Mineral Wool Core / 0.6mm Steel Skins.

Maximum uniformly distributed ultimate wind load (kPa) for the given span:

Single Span, wind pressure acting inwards/outwards				
Span (mm)	Panel Thickness (mm)			
	FlameGuard®		FlameGuard® Plus	
	50	75	100	150
1500	1.88	2.81	3.75	5.63
2700	1.04	1.56	2.08	3.13
3900	0.72	1.08	1.44	2.16
5100	0.49	0.78	1.04	1.56
6300	0.30	0.51	0.68	1.02

Multi-span, wind pressure acting inwards/outwards				
Span (mm)	Panel Thickness (mm)			
	FlameGuard®		FlameGuard® Plus	
	50	75	100	150
1500	1.50	2.25	3.00	4.50
2700	0.83	1.25	1.67	2.50
3900	0.58	0.87	1.15	1.73
5100	0.44	0.66	0.88	1.32
6300	0.34	0.51	0.68	1.02

* Refer Notes 1 - 4.

Span Table

INTERNAL APPLICATIONS

Inside Buildings				
Span (mm)	Panel Thickness (mm)			
	FlameGuard®		FlameGuard® Plus	
	50	75	100	150
Walls (Non-Load Bearing)	6000	7200	8400	10000
Ceilings	2300	3400	4500	4500

* Refer Notes 3 - 9.

FlameGuard® Plus FRL Systems Vertical Walls				
Maximum FRL	Panel Thickness (mm)			
	100	100	100	150
	-/30/30	-/60/60	-/90/90	-/60/60 -/180/180

FlameGuard® Plus FRL Systems Horizontal Walls			
Maximum FRL	Panel Thickness (mm)		
	100	100	150
	-/60/60	-/90/90	-/120/120

Bondor® provide a variety of FRL construction and fixing options. Refer to Bondor® for maximum span and up-to-date construction details.




Core	MW (Mineral Wool)
Width (cover mm)	1200, 1140**, 900**
Thickness (mm)	FlameGuard®: 50, 75 FlameGuard® Plus: 100, 150
Length	Up to 11m (check for availability)
External Material	0.6mm, 0.7mm G300 COLORBOND® steel
External Skin	COLORBOND® steel
External Finishes	Plain, Ribbed, Satinline, Shadowline Series 600/1200
Exterior Colour Options	Standard & Non-Standard colours. Check for availability.
Internal Material	0.6mm, 0.7mm G300 COLORBOND® steel
Internal Skin	COLORBOND® steel
Internal Finishes	Plain, Ribbed, Satinline, Shadowline Series 600/1200
Interior Colour Options	COLORBOND® Intramax™
Paint System	AS/NZS 2728 & AS 1397
Acoustic Properties	Rw 28 - 30 depending on thickness
Material Group Numbers	C1.10 Group 1 & 2
Bushfire Attack Level	FlameGuard®: BAL-40 FlameGuard® Plus: BAL-FZ (All exposed core to be covered with flashing)
FM Approval	FlameGuard®: 4880 FlameGuard® Plus: 4880 & 4881
Environmental	Zero Ozone Depleting Potential (ODP)
Combustibility	AS 1530.1 Non-combustible
Fire hazard properties	AS/NZS 1530.3
Ignitability Index	0
Spread of Flame Index	0
Heat Evolved Index	0
Smoke Index	3
SMOGR _{RC}	< 100

** Contact a local Bondor representative to discuss minimum order quantities for non-standard widths.


The technical information contained in this document cover a breadth of applications where Equitilt FlameGuard® may be used, which may be outside the scope of our CodeMark certificate. Data specific to CodeMark certification can be found on Equitilt FlameGuard®s CoC CM40149.

- SPAN TABLE NOTES:
- Extended span tables including wind pressure acting inwards are also available. Refer Bondor®.
 - Fixing with min. 2x 14g tek screws or 1x mushroom head bolts per panel are required.
 - Pressures specified are for wind gusts only per AS/NZS 1170.2.
 - Deflection limit of span/150 applies, and in accordance with Serviceability Limit State criteria per AS/NZS 1170.0 - TABLE C1.
 - This span table does not apply to cold store enclosure.
 - For ceilings, fixing with min. 14g tek screws (x4 off) per fixing point or mushroom head bolts (x1 off at end support and x2 off at intermediate supports) are required.
 - For ceilings, self weight of the panel has been allowed for, plus an allowance of up to 10kg/m² for light duty fittings (lights, etc.). No other dead loads permitted.
 - Non-trafficable maintenance access (concentrated load) of 110kg on any one panel has been allowed for.
 - Distributed live load of 0.25kPa (as per AS/NZS 1170.1) has been allowed for. Bondor® tests comply with details outlined in AS 4040.0, AS 4040.1, AS 4040.2, AS 4040.3, AS 1562.1 and AS/NZS 1170.1.

Joint

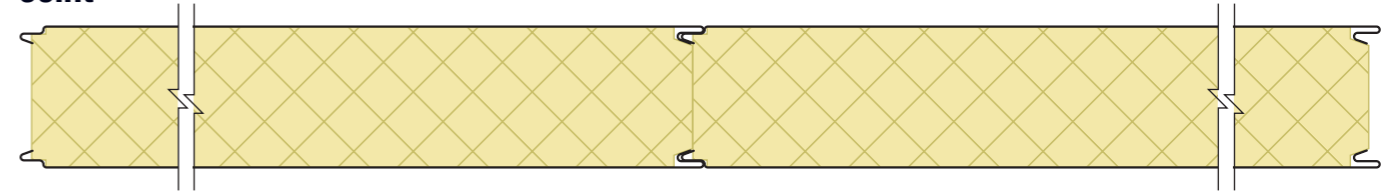

Profiles

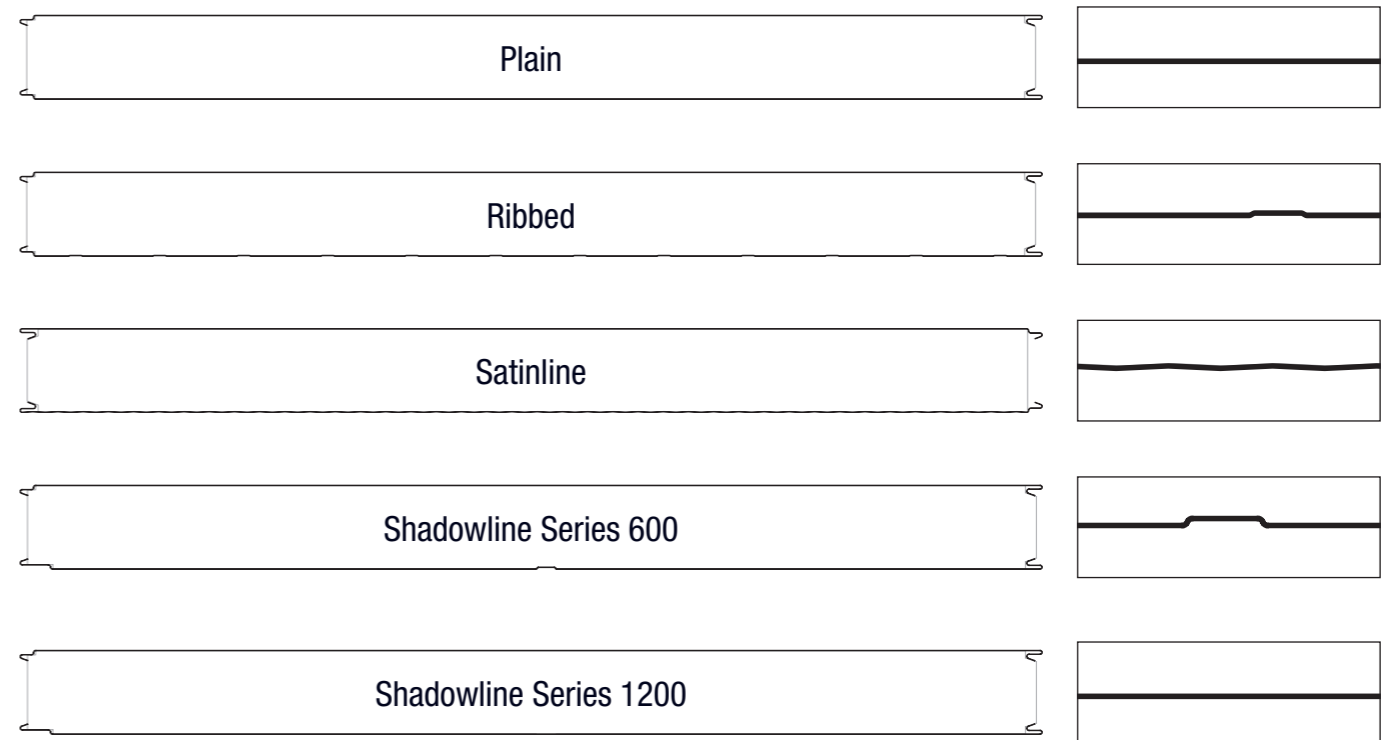

Dimensions



Bondor® National Network

BRISBANE / EXPORT 103 Ingram Road Acacia Ridge QLD 4110 T: 07 3323 8500 F: 07 3323 8501	MELBOURNE 6 Dunmore Drive Truganina VIC 3029 T: 03 8326 8000 F: 03 8326 8099	SYDNEY 49 – 53 Newton Road Wetherill Park NSW 2164 T: 02 9609 0888 F: 02 9729 1114
PERTH 17 Gauge Circuit Canning Vale WA 6155 T: 08 9256 0600 F: 08 9256 0620	ADELAIDE 70 – 72 Rundle Road Salisbury South SA 5106 T: 08 8282 5000 F: 08 8282 5099	LAUNCESTON 7 Connector Park Drive Kings Meadows TAS 7249 T: 03 6335 8500 F: 03 6335 8544

To connect to your nearest Bondor® branch simply call 1300 300 099 or visit www.bondor.com.au

Metecno Pty Limited. ABN 44 096 402 934. The manufacturer reserves the right to change the specification without notice. Bondor®, Equitilt®, BondorPanel®, FlameGuard®, FlameGuard® Plus, MetecnoPanel®, MetecnoInspire®, EconoClad®, MetecnoKasset®, MetecnoTherm®, InsuWall®, LuxeWall®, DesignerWall®, SolarSpan®, InsuRoof®, MetecnoSpan®, CoolRoof®, Equideck®, InsuLiving®, Metecno® are trademarks of Metecno Pty Limited. BlueScope, COLORBOND®, Intramax™ and colour names are trademarks of BlueScope Steel Limited. The colours shown in this publication have been reproduced to represent actual product colours as accurately as possible. However, given printing limitations, we recommend checking your chosen colour against an actual sample before placing orders. This advice is of a general nature only. Designers must provide for adequate structural performance and other Building Code requirements. *Conditions may apply. **Limited availability, minimum order quantity may be required. ^Check with NCC for permissible solar absorbance before selecting the exterior roof colour. Darker colours may be warranted for use in limited regions refer to www.bondor.com.au as this information is subject to change. Consult Bondor® for your application. B0N0126 Tech Data Sheets - Equitilt Flameguard Plus v52. 06/07/2021



Leaders in Thermal & Architectural Building Solutions